

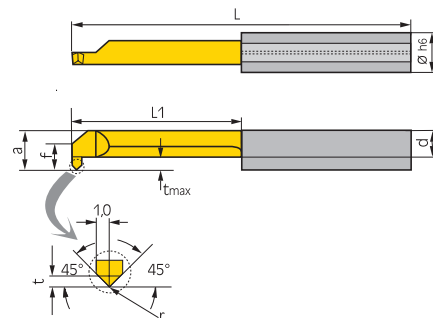



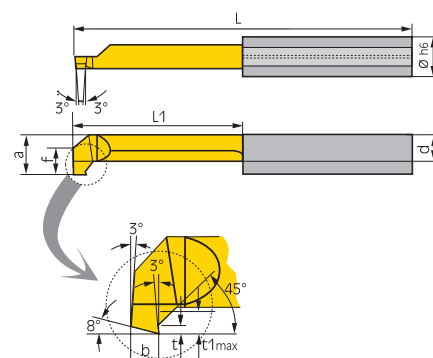

Belső esztergálás és sarokletörés

- 5 mm-es furatátmérőtől
- belső hűtőfolyadék-bevezetéssel



Megnevezés	D1 mm	f mm	R mm	d2 mm	s mm	L mm	L1 mm	T max. mm	D min. mm	A következőkhöz alkalmas:	ISO P M K CN45F TiN jobbos Cikkszám €	ISO P M K CN45F TiN balos Cikkszám €
R/L 060.5-15	5,0	1,9	0,2	3,3	4,4	30	15	0,7	5,0	645...	304310 0001 31,50	304315 0001 31,50
R/L 060.5-20	5,0	1,9	0,2	3,3	4,4	35	20	0,7	5,0	645...	304310 0505 32,30	304315 0505 32,30
R/L 060.7-20	7,0	2,8	0,2	3,7	6,3	35	20	0,7	6,8	676...	304310 0010 36,60	304315 0010 36,60
											3125	3125



Belső beszurás és sarokletörés az azt követő leszúrás számára

- 5 mm-es furatátmérőtől

5 mm-es fordáramatú										ISO 		ISO 	
Megnevezés	D1 mm	W mm	f mm	s mm	L mm	L1 mm	T max. mm	D min. mm	A következőkhöz alkalmas:	CN45F TiN jobbos Cikkszám	€	CN45F TiN balos Cikkszám	€
R/L 070.4-10	4,0	1,0	1,5	3,5	25	10	0,8	4,0	645...	304410 0002	30,20	304415 0002	30,20
R/L 070.4-16	4,0	1,0	1,5	3,5	30	16	0,8	4,0	645...	304410 0003	30,90	304415 0003	30,90
R/L 070.5-15	5,0	1,0	1,9	4,4	30	15	1,0	5,0	645...	304410 0001	30,90	304415 0001	30,90
R/L 070.5-20	5,0	1,0	1,9	4,4	35	20	1,0	5,0	645...	304410 0505	34,10	304415 0505	34,10
R/L 070.5-30	5,0	1,0	1,9	4,4	45	30	1,0	5,0	645...	304410 0004	41,80	304415 0004	41,80
R/L 070.6-30	6,0	1,0	2,3	5,3	45	30	1,0	6,0	676...	304410 0005	41,80	304415 0005	41,80
R/L 070.6-42	6,0	1,0	2,3	5,3	57	42	1,0	6,0	676...	304410 0006	48,90	304415 0006	48,90
										3125		3125	

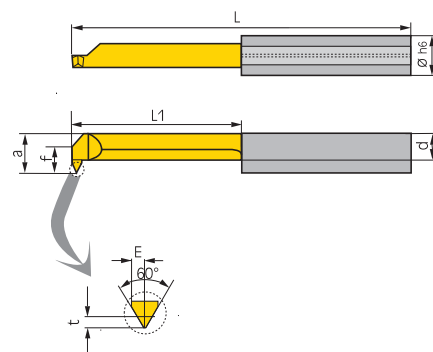

Belső menetesztergálás

- metrikus ISO menet, 4,8 mm-es furatátmérőtől
- Részprofil, 1,0–1,5 mm-es emelkedésekhez

ISO 										ISO 	
Megnevezés	Emelkedés mm	T max. mm	f mm	d2 mm	s mm	L mm	L1 mm	D min. mm	A következőkhöz alkalmas:	CN45F TiN jobbos Cikkszám €	CN45F TiN balos Cikkszám €
R/L 005.0510-15	1,0	0,55	1,9	3,3	4,4	30	15	4,8	645...	304501 0001 34,70	304505 0001 34,70
R/L 005.0510-20	1,0	0,55	1,9	3,3	4,4	35	20	4,8	645...	304501 1005 35,60	304505 1005 35,60
R/L 006.0612-15	1,25	0,68	2,3	3,4	5,3	30	15	6,0	676...	304501 0010 34,70	304505 0010 34,70
R/L 006.0612-22	1,25	0,68	2,3	3,4	5,3	37	22	6,0	676...	304501 1256 35,60	304505 1256 35,60
R/L 006.0815-15	1,5	0,81	2,3	3,4	5,3	30	15	6,0	676...	304501 0012 34,70	304505 0012 36,10
R/L 006.0815-22	1,5	0,81	2,3	3,4	5,3	37	22	6,0	676...	304501 1506 35,60	304505 1506 35,60
R/L 007.0815-15	1,5	0,81	2,7	3,8	6,3	30	15	7,0	676...	304501 0020 34,70	304505 0020 34,70
										3125	3125