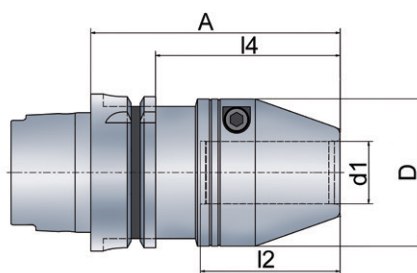


SARA® HYDRO-Grip HG hidraulikus tokmány

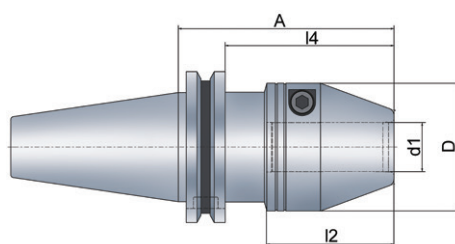
- HSK 63 és ISO 40, kiegyensúlyozva, G2,5 / 25 000⁻¹
- Körfutási pontosság: < 0,004 mm (2,5 x D méretnél)
- h6 vagy h7 szerszámszár-minőség
- szűkítőhüvelyekhez is alkalmas
- merev konstrukció

powered by ETP

**DIN 69893, A forma – HSK-A**

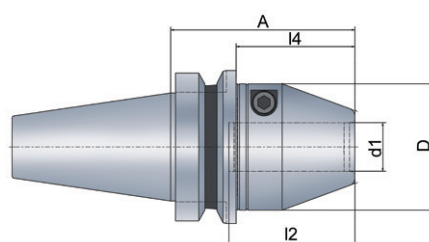
Szár	d1 mm	D mm	A mm	l4 mm	l2 mm	Cikkszám	€
HSK 63	12	43,5	76	50	40	433817 6012	399,-
HSK 63	12	43,5	100	74	40	433817 6112	519,-
HSK 63	20	52	88	62	52	433817 6020	399,-
HSK 63	20	52	150	124	52	433817 6120	539,-
HSK 63	25	59	100	74	56	433817 6025	399,-
HSK 63	25	59	150	124	56	433817 6125	539,-
HSK 63	32	69,5	105	79	79	433817 6032	399,-

4130

**DIN ISO 7388-1 AD**

Szár	d1 mm	D mm	A mm	l4 mm	l2 mm	Cikkszám	€
SK40	12	43,5	56	37	40	433827 4012	345,-
SK40	12	43,5	100	81	40	433827 4112	445,-
SK40	20	52	88	69	52	433827 4020	345,-
SK40	20	52	125	106	52	433827 4120	445,-
SK40	25	59	93	74	56	433827 4025	345,-

4130

**DIN ISO 7388-2 AD**

Szár	d1 mm	D mm	A mm	l4 mm	l2 mm	Cikkszám	€
BT 40	12	43,5	64	37	40	433837 4012	345,-
BT 40	12	43,5	100	73	40	433837 4112	445,-
BT 40	20	52	76	49	52	433837 4020	345,-
BT 40	20	52	125	98	52	433837 4120	445,-
BT 40	25	59	80	53	56	433837 4025	345,-

4130

