


DIN ISO 7388-1 / DIN 69871 AD

- belső hűtőfolyadék-bevezetés
- **A = 160 és 200 mm, hűtőcsatornákkal, belső hűtőfolyadék-bevezetéssel rendelkező** késfejekhez

Szár	d mm	A mm	D mm	L2 mm	Cikkszám	€
SK40	16	55	32	17	434903 4016	57,-
SK40	16	100	32	17	434903 4116	72,50
SK40	16	160	32	17	434903 4216	140,50
SK40	22	55	40	19	434903 4022	58,70
SK40	22	100	40	19	434903 4122	74,30
SK40	22	160	40	19	434903 4222	145,-
SK40	27	55	48	21	434903 4027	58,70
SK40	27	100	48	21	434903 4127	75,40
SK40	27	160	48	21	434903 4227	152,-
SK40	32	60	58	24	434903 4032	65,10
SK40	32	100	58	24	434903 4132	77,70
SK40	32	160	58	24	434903 4232	160,50
SK40	40	60	70	27	434903 4040	74,30
SK50	16	55	32	17	434903 5016	79,50
SK50	16	100	32	17	434903 5116	93,20
SK50	16	160	32	17	434903 5216	175,-
SK50	16	200	32	17	434903 5316	209,-
SK50	22	55	40	19	434903 5022	79,50
SK50	22	100	40	19	434903 5122	93,20
SK50	22	160	40	19	434903 5222	179,50
SK50	22	200	40	19	434903 5322	216,-
SK50	27	55	48	21	434903 5027	80,60
SK50	27	100	48	21	434903 5127	94,90
SK50	27	160	48	21	434903 5227	185,50
SK50	27	200	48	21	434903 5327	225,-
SK50	32	55	58	24	434903 5032	82,80
SK50	32	100	58	24	434903 5132	96,10
SK50	32	160	58	24	434903 5232	197,50
SK50	32	200	58	24	434903 5332	242,-
SK50	40	55	70	27	434903 5040	92,10
SK50	40	100	70	27	434903 5140	104,-
SK50	40	160	70	27	434903 5240	215,-
SK50	40	200	70	27	434903 5340	253,-

4117

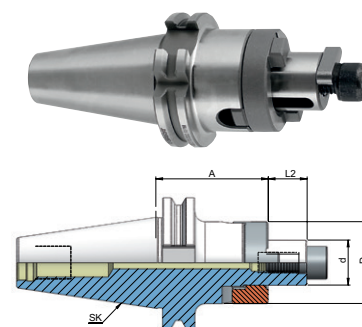

DIN ISO 7388-2 / MAS BT JIS B 6339

Szár	d mm	A mm	D mm	L2 mm	Cikkszám	€
BT 40	16	55	32	17	434907 4016	57,-
BT 40	16	100	32	17	434907 4116	72,50
BT 40	22	55	40	19	434907 4022	58,70
BT 40	22	100	40	19	434907 4122	74,30
BT 40	27	55	48	21	434907 4027	58,70
BT 40	27	100	48	21	434907 4127	75,40
BT 40	32	60	58	24	434907 4032	65,10
BT 40	32	100	58	24	434907 4132	77,70
BT 40	40	60	70	27	434907 4040	74,30
BT 50	16	70	32	17	434907 5016	79,50
BT 50	22	70	40	19	434907 5022	79,50
BT 50	27	70	48	21	434907 5027	80,60
BT 50	32	70	58	24	434907 5032	82,80
BT 50	40	70	70	27	434907 5040	92,10

4117

